

D326 / E35-6 (9-15)

Double Inlet Centrifugal Fan 1800 CFM 220V 1N~ 50 Hz

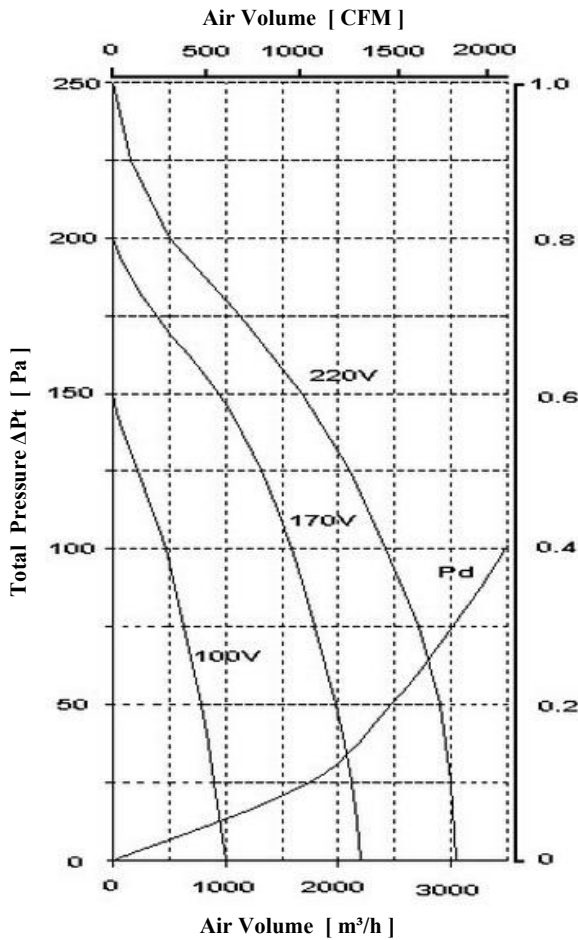


Diagram is based on standard air $\rho=1.2 \text{ kg/m}^3$.
Pd is system curve for dynamical pressure part related to Fan Outlet Area (Curve for free blowing fan). **Total Pressure** (the sum of the dynamic and static pressures) is shown in relation to the **Air Volume**. Dynamic pressure is shown below system line Pd and Static Pressure is shown above that line.

- Voltage Range 100 ~ 220 [V]
- Frequency 50 [Hz]
- Current *max @ free air* 2.4 [A]
- Power *max @ free air* 470 [W]
- Fan speed *@ free air* 700 [rpm]
- Insulation Class H
- Protection Class IP65
- Power Factor (cos ϕ) 0.90
- Capacitor 20 [μF] 400 [V]
- Net Weight 17.5 [kg]
- Starting Torque 1.5 [nm]
- Starting Current *max* 4 [A]
- Air Temperature *max* 60 [$^{\circ}\text{C}$]

Voltage [V]	Air Volume [m³/h] @ $\rho=1.2 \text{ kg/m}^3$						
	Free Air	50	100	150	175	200	225
100	1040	790	465				
170	2090	1970	1580	945	390		
220	2880		2410	1685	1135	500	150

Wheel Diameter = 230 mm = 9 in
 28 Blades , 25 mm = 1 " Chord Width
 Tip Speed = rpm * 0.012 [m/s]
 = rpm * 2.37 [FPM]
 Outlet Area = 0.089 [m²] = 0.96 [SQ.FT.]

Voltage [V]	Sound Pressure Level in dB(A)		
	100	170	220
Inlet	46	57	62
Outlet	48	58	63

Measured in distance of 3m , @ free air

